

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

FIG.1

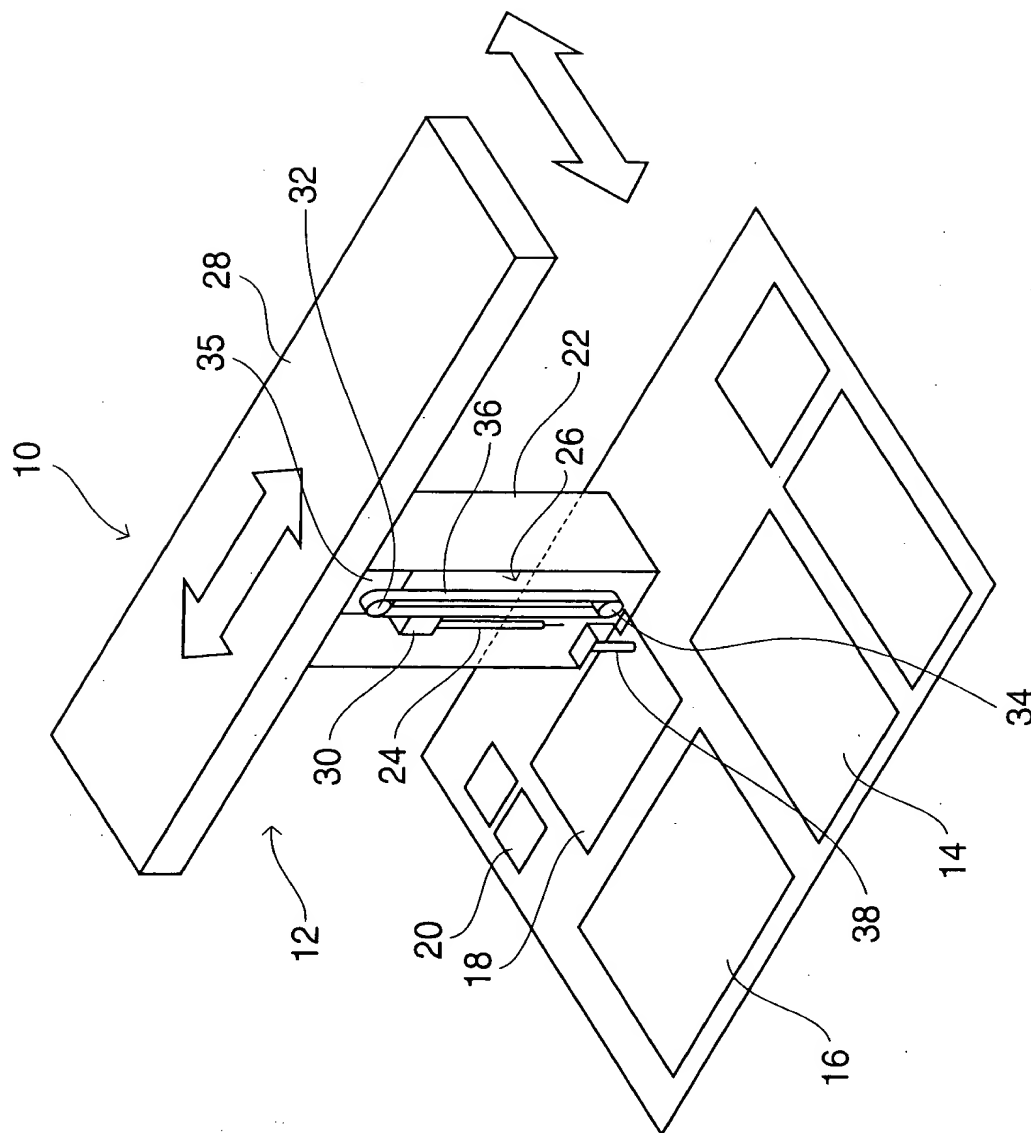


FIG.2

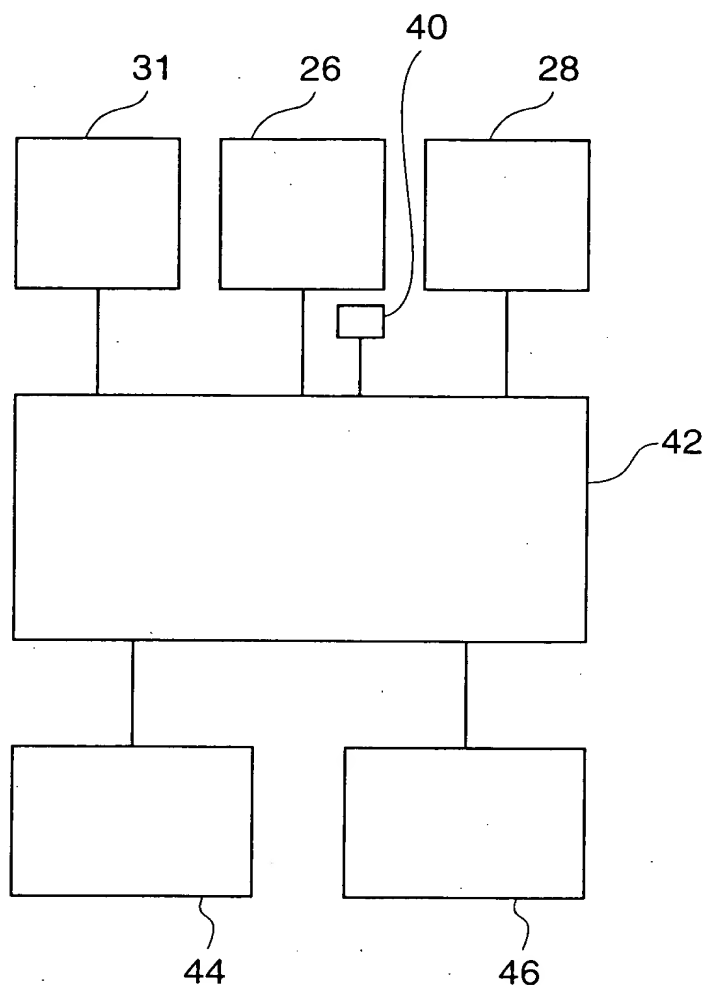


FIG.3

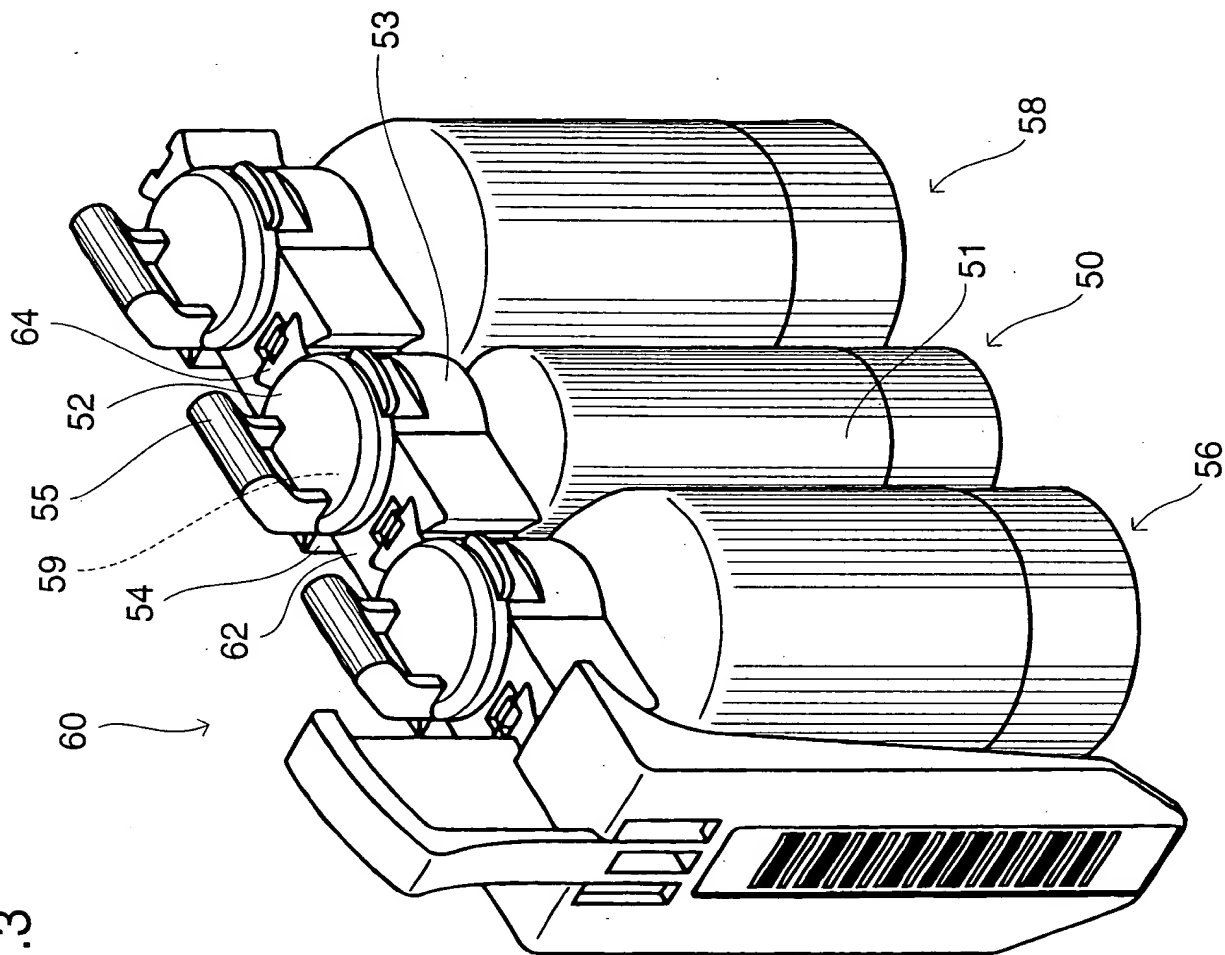


FIG.4


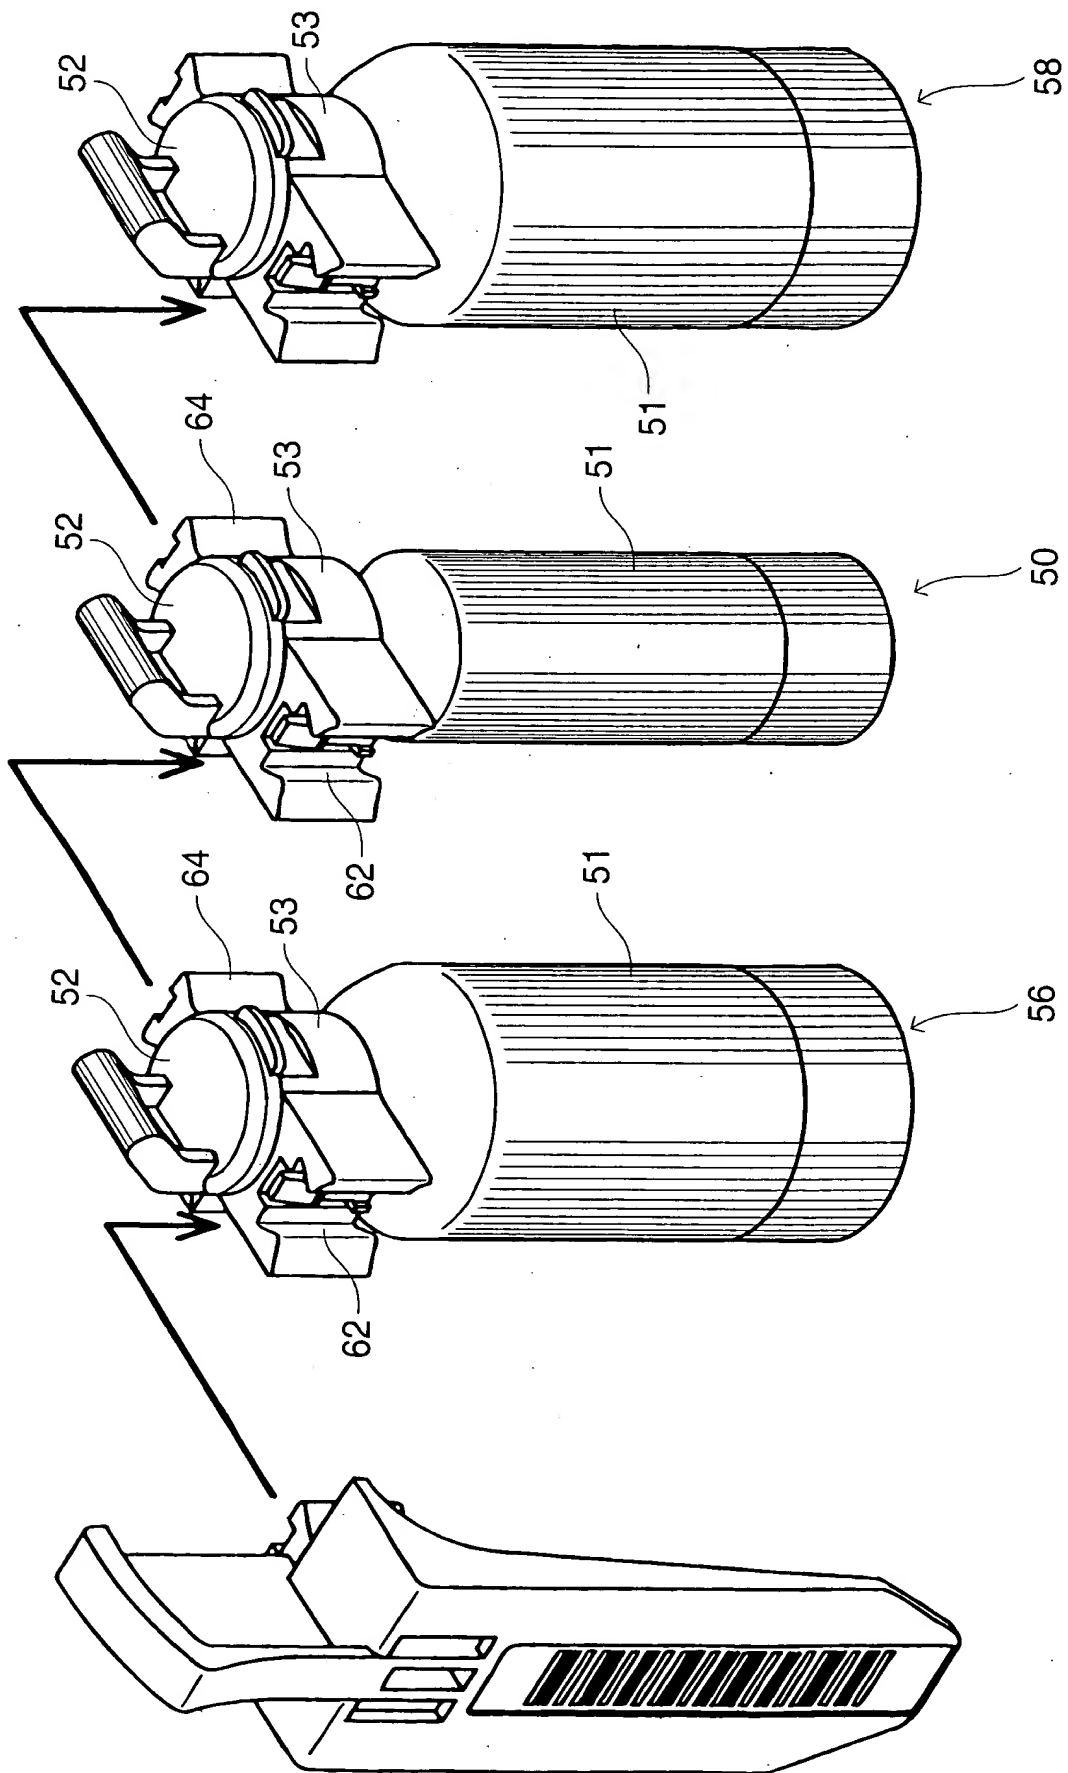


FIG. 4 is a perspective view of the device assembly. The device assembly includes a base unit (60) and four cylindrical components (50, 56, 58). The base unit (60) includes a handle (62) and a trigger (64). The cylindrical components (50, 56, 58) are shown in a perspective view. The cylindrical components (50, 56, 58) are shown in a perspective view. The cylindrical components (50, 56, 58) are shown in a perspective view.

APPROVED	O.G. FIG.
BY	CLASS SUBCLASS
DRAFTSMAN	

FIG.5

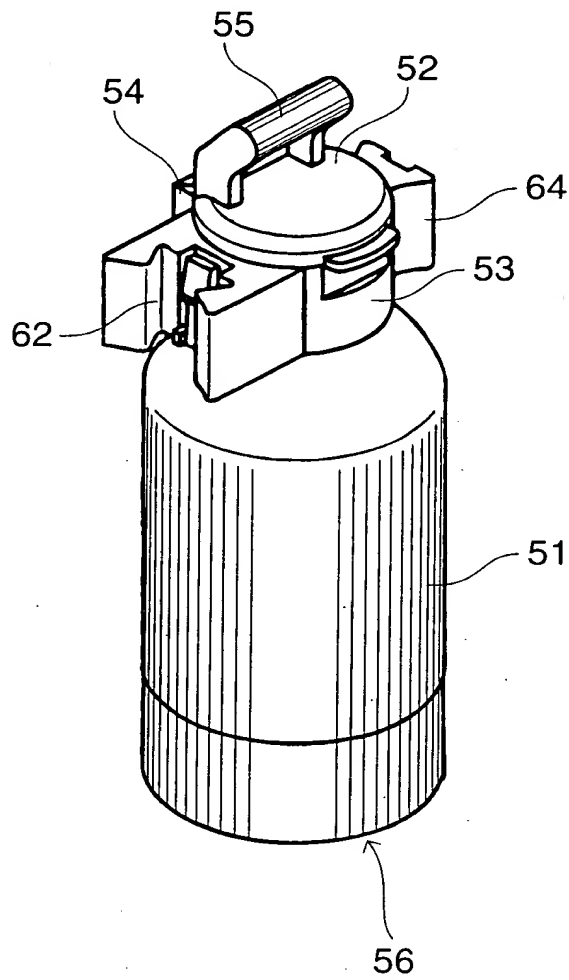

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
CRAFTSMAN		

FIG.6

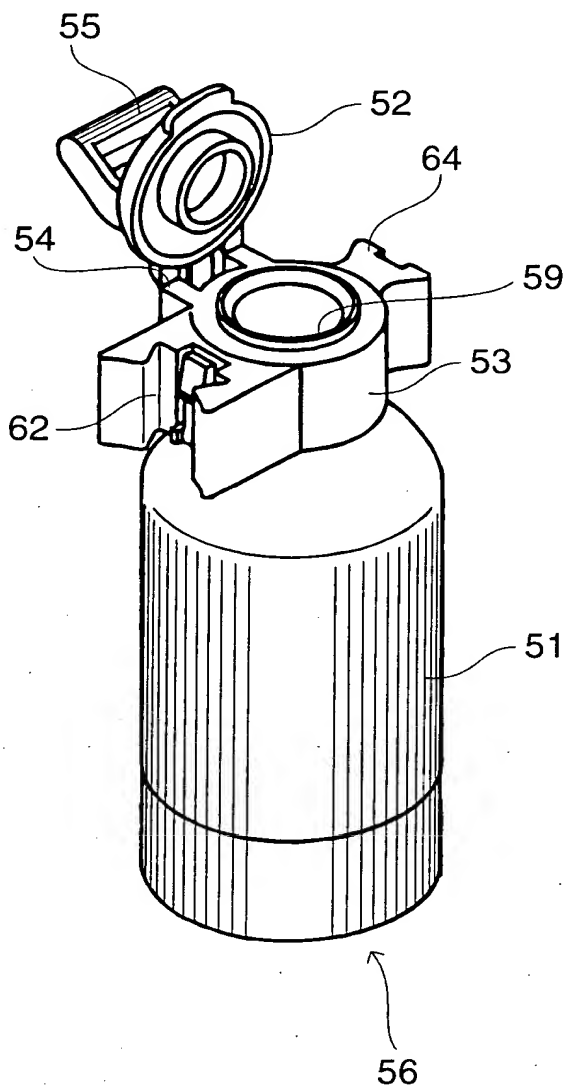


FIG. 7a

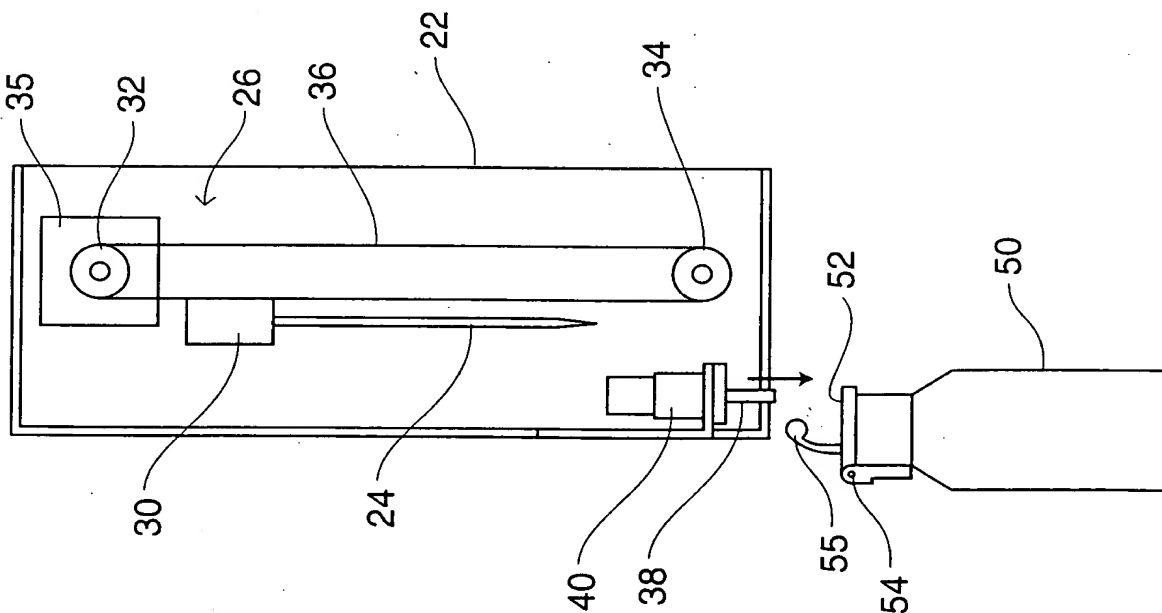


FIG. 7b

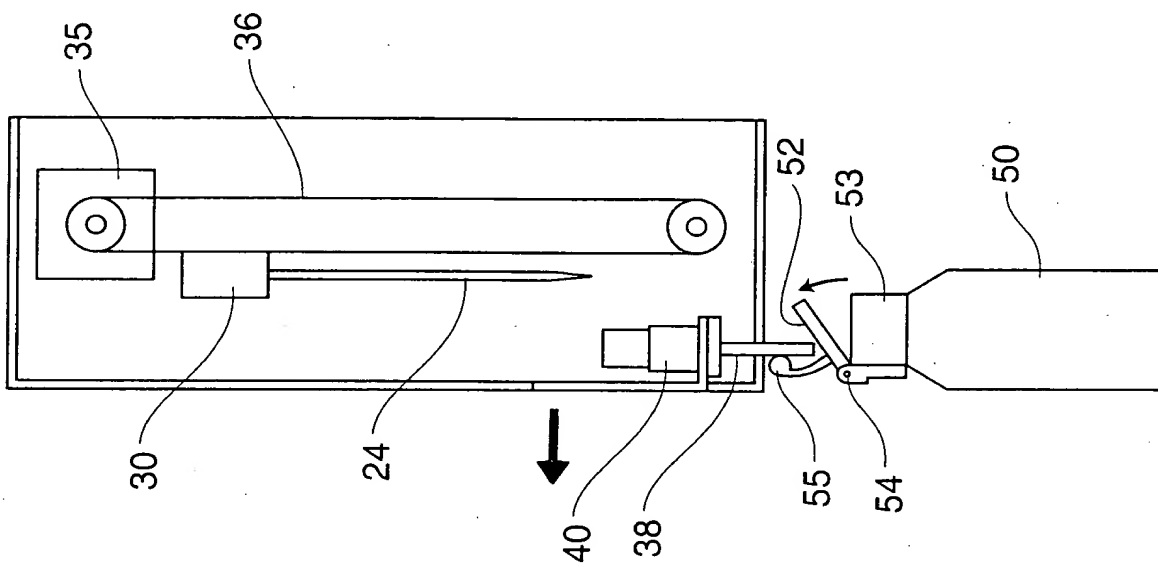






FIG.7f

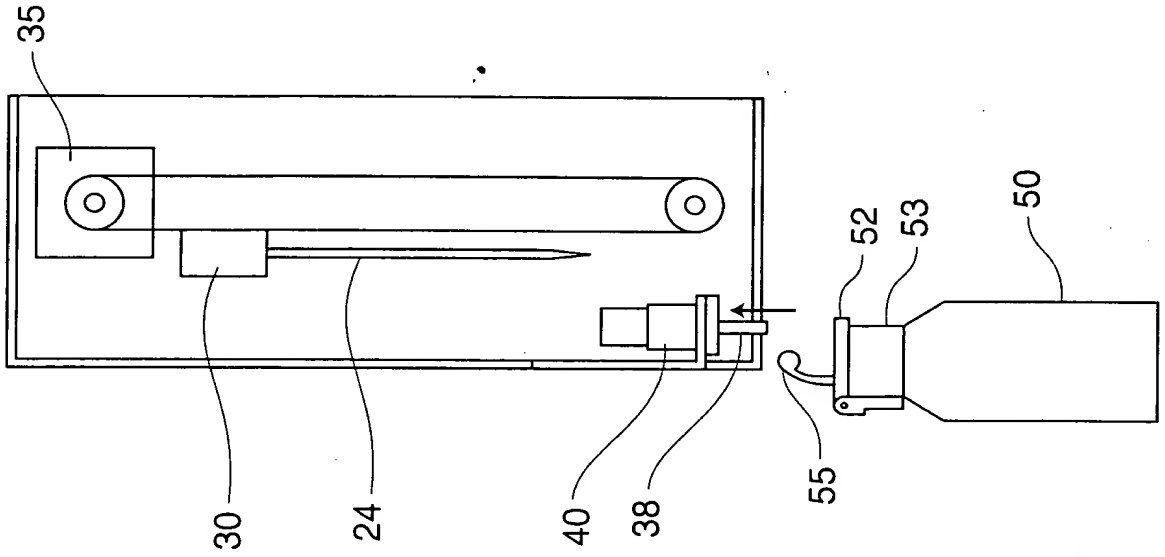


FIG.7e

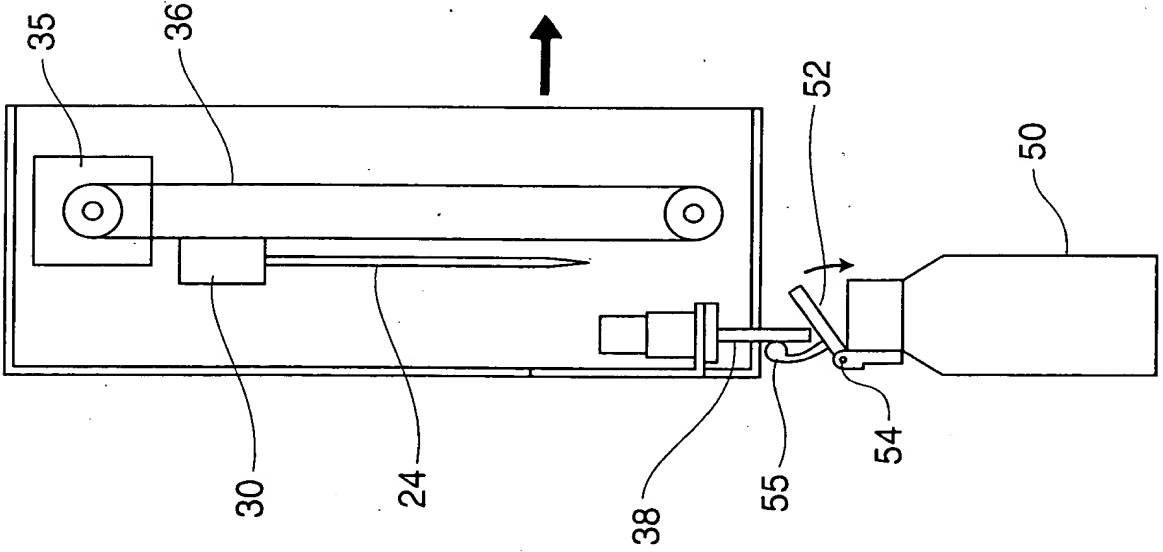


FIG.8

